



Traffic Management Products
Unit 6 Britannia Park, Trident Drive,
Wednesbury, West Mids. WS10 7XB



0121 227 8639



www.trafficmanagementproducts.co.uk



Manchester

Traditional bollard styling

The ideal cost-saving alternative for town centres.

Application

Town/City centres, pedestrian areas, roadside and public spaces.

Safety

The Manchester is available as either standard, or with a steel core or as a reboundable bollard. For high-risk traffic calming applications we recommend our reboundable variant. Our rebound material bollard has been tested to BS EN 12767:2019 and will deliver significant cost-savings due to its ability to rebound on impact.

Security

Where perimeter protection is needed, our Manchester bollard is available with an inner steel tube. This is a great option for protecting pedestrians and other valuable assets.

Long life


Our bollards are built to last. They're abrasion and chip resistant, as well as being resistant to salt spray and uric acid. Plus at the end of their lives, our bollards are recyclable.

Compatibility

The whole of our street furniture bollard range has been designed with the option of our innovative LockSafe® system. This means our LockSafe® roots are directly compatible with industry standard sockets already in the ground. We have options for both round and square ground sockets.

LockSAFE®

Specifications

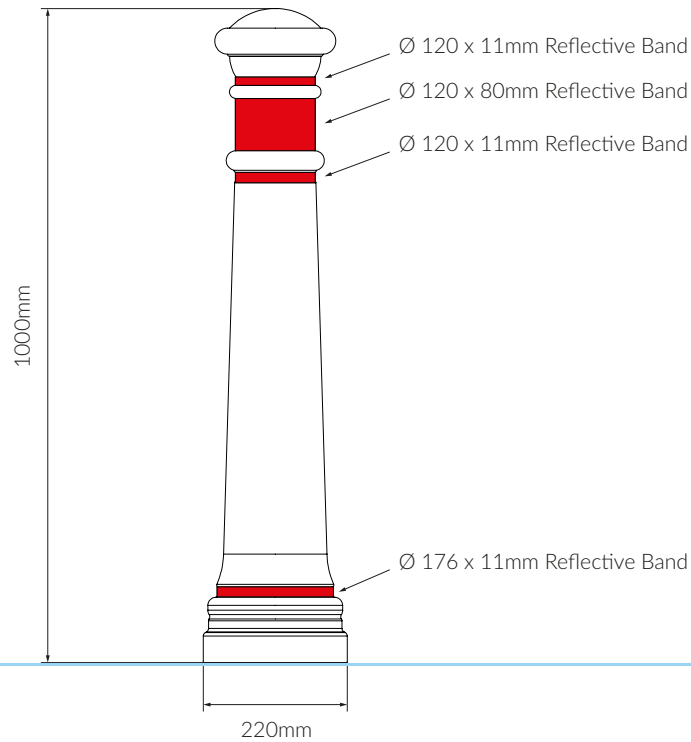

Standard Material:

Rotationally moulded using an advanced polyethylene, our standard bollards are durable, ultraviolet light resistant and have great low-temperature impact resistance.

Rebound Material:

Our rebound bollards are rotationally moulded using a specially formulated type of low density polyethylene (LDPE). This makes our bollards flexible on impact, resistant to UV light and very durable.


Passively Safe to BS EN 12767:2019 - 100-NE-A-R-NS-MD-0
70-NE-A-R-NS-MD-0
50-NE-A-R-NS-MD-0

BS EN 12767:2007 - 100:NE:4

Material	Polyethylene
Colour	Black as standard (other colours available)
Sign face	n/a
Banding options	80mm 3 x 11mm Or none
Banding colour	Red White Red & White Custom
	BS EN 12899-1 2007 compliant retro-reflective material
Installation options	Steel-core Bolt-Down Concrete-in Root
	LockSafe®- SQ Root LockSafe®- R Root LockSafe® Socket
Recyclable	Yes
Warranty	1 Year Full Manufacturers Warranty

Foundations


Bolt Down Standard and Reboundable (Surface Mounted) (Flange Fixed)




Depth dependant on fixing and substrate type





Steel-Core Secure 1320 x 114 x 5mm mild steel insert



Concrete-in Root Standard and Reboundable (Same root as LockSafe-SQ but without the mechanism)





LockSAFE-SQ Root Standard and Reboundable




TMP Socket
(For LockSafe-SQ root bollards)

LockSAFE-R Root Standard and Reboundable



**Retrofit - Glasdon
LockFast™ Socket**
("Square" Socket)



**Retrofit - Glasdon
Ground Socket**
("Round" Socket)

Our bollards can be installed in a 400mm wide by 400mm deep excavation using quick-setting concrete, e.g. Grade QC10, but the exact installation requirements should be assessed by a site survey. We recommend our LockSafe® socket is bedded on gravel to help drainage and alignment.

Note: It is important to avoid contact between the socket or bollard and hot tarmac/adam as this will impair performance.

We operate a policy of continuous product development and reserve the right to change or improve specification without prior notice. E & OE.
© 2022 Traffic Management Products Limited All Rights Reserved. Traffic Management Products Limited, company number 3207588,
with our registered offices at Traffic Management Products Limited, Unit 6, Britannia Park, Trident Drive, Wednesbury. WS10 7XB

